


PROTECTED TRANSITIONS and CASINGS for gas

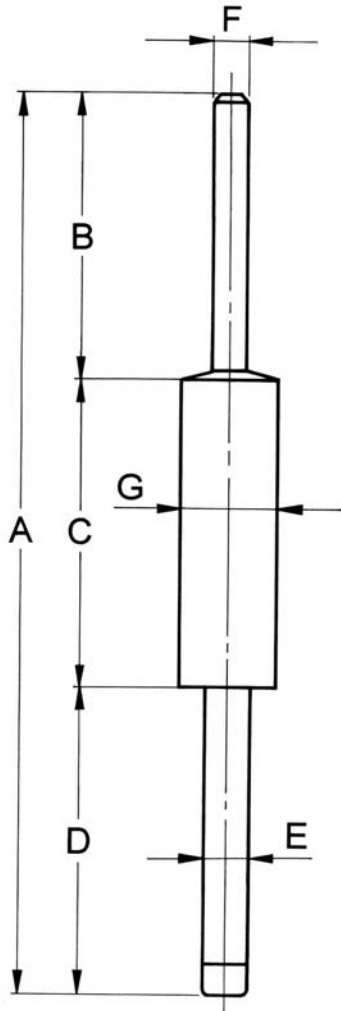

PROTECTED TRANSITIONS St / PE

SIZES, REFERENCES AND DIMENSIONS

SIZE	REFERENCE	A	B	C	D	E	F	G
DN 25	TA 25 AR	850	145	400	305	32	1"	55
DN 32	TA 32 AR	850	150	400	300	40	1 1/4"	65
DN 50	TA 50 AR	865	165	400	300	63	2"	89

PROTECTED TRANSITIONS Cu / PE

SIZES, REFERENCES AND DIMENSIONS

SIZE	REFERENCE	A	B	C	D	E	F	G
DN 25	TA 25 CU	850	145	400	305	32	22	55
DN 32	TA 32 CU	850	150	400	300	40	42	65
DN 50	TA 50 CU	865	165	400	300	63	54	89

CASINGS

SIZES, REFERENCES AND DIMENSIONS

Size	Reference	Ø	L
DN 25	VAINA25	35	2 m
DN 32	VAINA32	63	2 m
DN 50	VAINA50	76	2 m

PARTS

SPECIFICATIONS

PE PIPE	NT-011-GN, Polyethylene
St PIPE	UNE 19.040, Steel
Cu PIPE	UNE EN 1057, Copper
PLUG	NT-041-GN, Polyethylene
O-RING	UNE 53-591, NBR Rubber
SLEEVE	UNE 37-103, Brass
SOLDERING	DIN Ag 34 CD
DN 25/32 COUPLING	UNE 37-103, Brass
DN 50 COUPLING	Bronze
ANTI-HUMIDITY	Polyurethane
TRANSITION CASING	DIN 2440 St 33.2, Steel
CASING	AISI 304, Stainless Steel
CASING PLUG	UNE 53-591, NBR Rubber



interTORRE

Selva de Mar 135-145 ● 08020 Barcelona ● Spain
 Tel. 93 307 31 60 ● Fax 93 307 35 08
 promo@torre.biz ● www.torre.biz

Eng 22-04-07

